

SD SE SERIES

SE150

FOR HD / 4K PORTABLE CAMERAS

The Shotoku SE range has evolved from a concept of providing high functionality and application flexibility in a support system designed for the extended range of camera systems available today. It features a high quality drag system to ensure smooth on air moves and a multiple level counterbalance system to ensure accurate balancing of a wide range of cameras.

The SE150 supports up to 16kg (35 lbs) and has 10 levels of counterbalance and 6 grades of drag. The system comes complete with an aluminum or carbon fiber 2 stage tripod, mid or ground level spreader and a soft carrying case. A dolly option is available.



SPECIFICATIONS

Max. Payload	16kg / 35.3lbs
Optimum Payload Range	2kg - 14kg / 4.4lbs - 30.8lbs
Pan Range	360°
Tilt Range	+80° ~ -75°
Counterbalance	10 Steps
Pan and Tilt Drag	6 Steps (5 + 0)
Camera Fixing	Two-Way sliding quick-release plate with 2x3/8" screw
Pan Bar	Single, Fixed-Length
Mount	100mm Ball
Temperature Range	-40° C to 60° C / -40° F to 140° F
Level	Illuminated Bubble
Weight	3.1kg / 6.8lbs

SE150 - A2G SYSTEM

SE150 head + single fixed-length pan bar + 2-stage aluminum tripod + floor spreader + soft carrying case.

SE150 - A2M SYSTEM

SE150 head + single fixed-length pan bar + 2-stage aluminum tripod + mid-level spreader + soft carrying case.

SE150 - C2G SYSTEM

SE150 head + single fixed-length pan bar + 2-stage carbon tripod + floor spreader + soft carrying case.


SE150 - C2M SYSTEM

SE150 head + single fixed-length pan bar + 2-stage carbon tripod + mid-level spreader + soft carrying case.



SE150 - C2M System

BALANCE / PAYLOAD CURVE

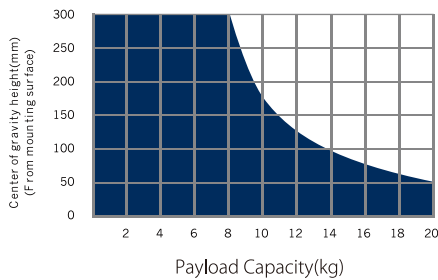

SYSTEM PACKAGE SPECIFICATIONS

System Weight (Aluminum Tripod)	8.5kg / 18.7lbs
System Weight (Carbon Fiber Tripod)	7.2kg / 15.9lbs
System Height Range	500mm - 1700mm / 19.7" - 66.9"
System Transportation Length	880mm / 34.6"